


CENTERING / FITTING SLEEVES always precision-ground

Our flexible aid for various applications.

External diameters from 6 to 25 mm, lengths from 6 to 40 mm – flexible or non-flexible

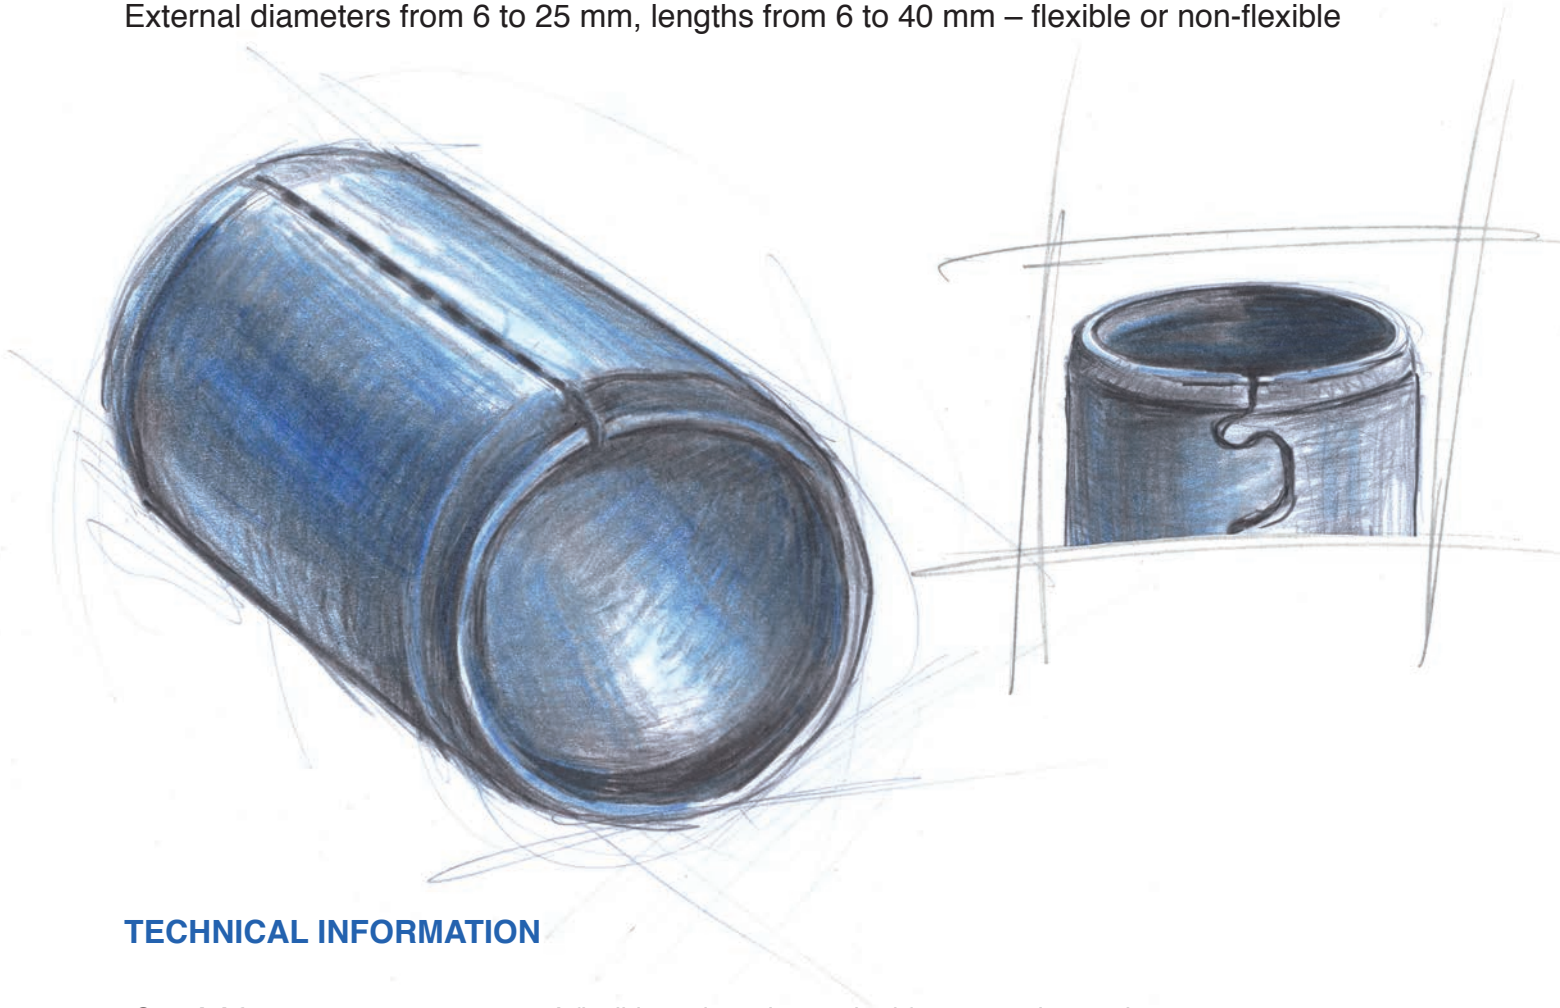

TECHNICAL INFORMATION

Special features:

A flexible and precise method for connecting mating parts.
Sleeves do not become interlocked and can be assembled automatically without difficulty.

- with tightly closed slot
- bevelled/faceted if desired
- force fit in the location hole

Materials:

- cold rolled steel strip according to EN 10139
- spring band steel according to EN 10132-4
- other materials such as aluminium available upon request

AREAS OF APPLICATION

ENGINES . GEARS . TRANSPORT AGGREGATES . MOBILE INDUSTRIAL HANDLING EQUIPMENT